



# DROP-IN Circulator

## 925 ~ 985 MHz

## ADC095FD

### Features

- 21dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

### Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	925 ~ 985
Insertion Loss	dB Max.	0.45
Isolation	dB Min.	19
VSWR	Max.	1.25 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	150/100
Input/Output Impedance	$\Omega$	50

### Mechanical Dimensions

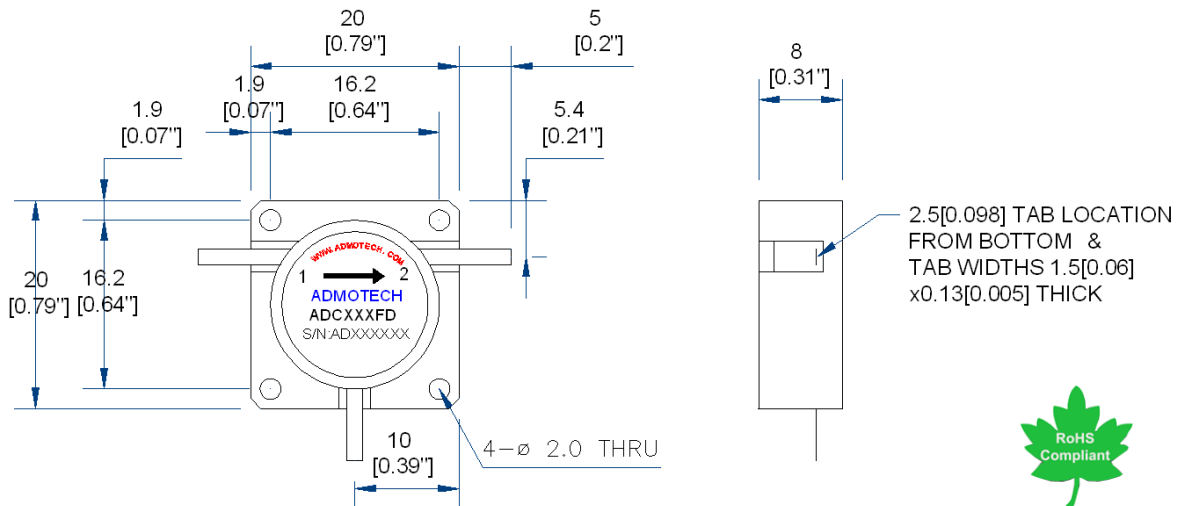

Unit: mm[inch]  
Tolerance:±0.2mm



Package size : FD  
Option Type : None  
Direction:Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com