



Coaxial SMA Type Circulator 1000 ~ 2000 MHz

ADC1020CSIH

Features

- 19dB typical Isolation, 0.5dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

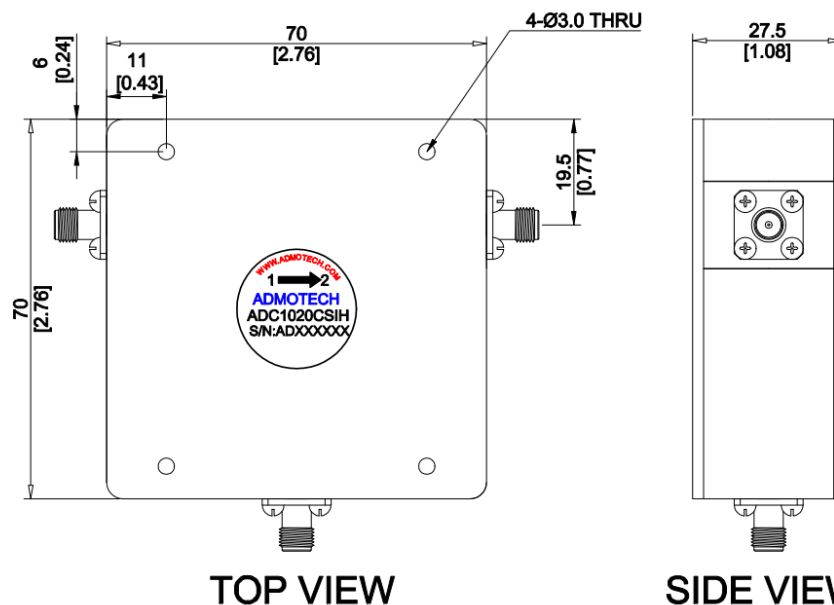
Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	1000~2000
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	16.5
VSWR	Max.	1.33 : 1
Temperature	°C	0 ~ 70
FDW./REV. Power	W Max.	50/50
Input/Output Impedance	Ω	50

Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]
Tolerance: ±0.2mm



If you do not find appropriate frequency range, please contact with sales@admotech.com