



Waveguide C-band Circulator

5.4~5.9 GHz

ADC565WR137(500)


Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	5.4~5.9
Insertion Loss	dB Max.	0.3
Isolation	dB Min.	20
VSWR	Max.	1.25 : 1
Temperature	°C	-30 ~ +85
Forward Power	W Max.	300 (Peak 3.5kW)
Waveguide Package	-	WR137

Mechanical Dimensions

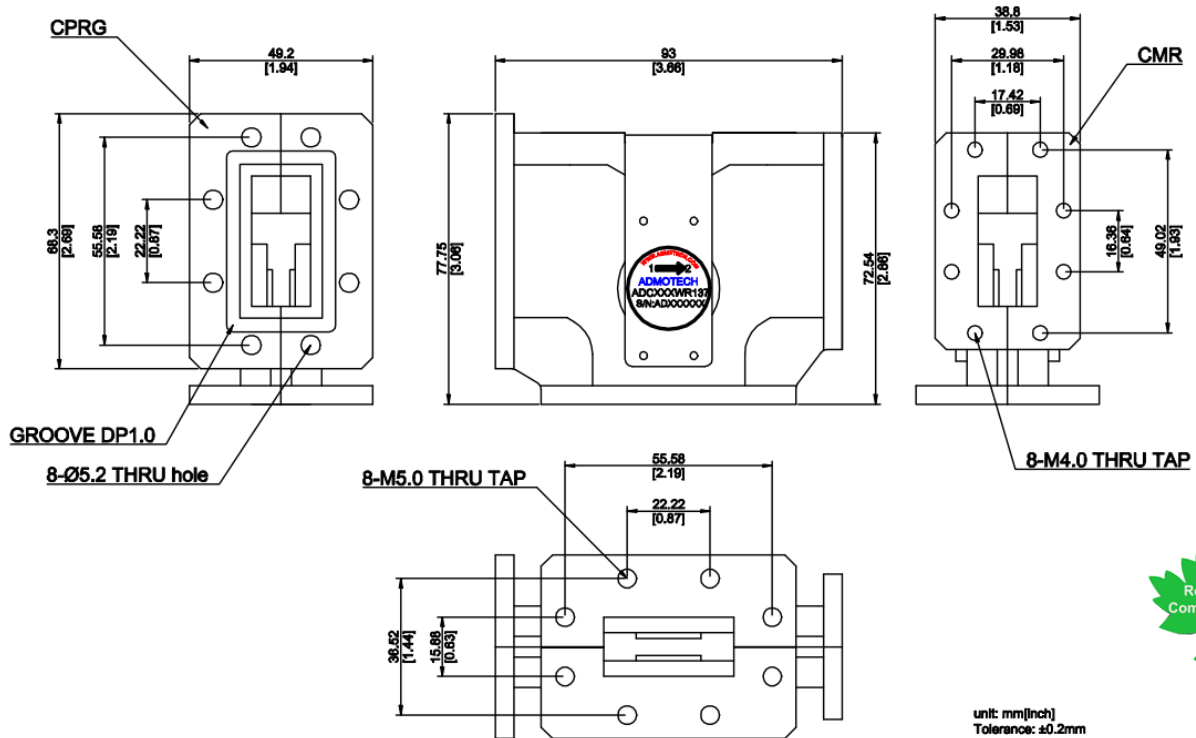

If you do not find appropriate frequency range, please contact with sales@admotech.com